


# Multi-contact connection device A1

with earth terminal socket A1 and three cylindrical earthing bolts with annular groove.

The triple earth connection serves to earth and short circuit three single-pole earthing and short-circuiting cables.

Short-circuiting bar and connecting angle of Cu/Sn, 40 x 8 mm. Total length 195 mm.

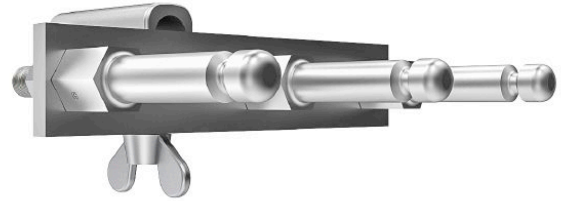

*Picture may vary.*

## Technical Data

<b>Article no.</b>	<b>364 900 001</b>	
<b>Area of application</b>	<b>Switchgear, Overhead Line</b>	
<b>Max. cross section of connected cable</b>	(mm <sup>2</sup> )	150
<b>Max. short-circuit current</b>	I <sub>k</sub> 1 s (A)	29600
<b>Short-circuiting bar</b>	L x B (mm)	195 x 40
<b>Short-circuiting bar thickness</b>	(mm)	8