
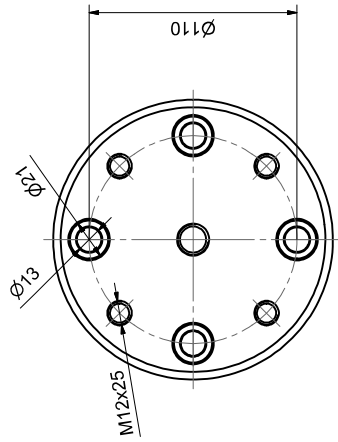
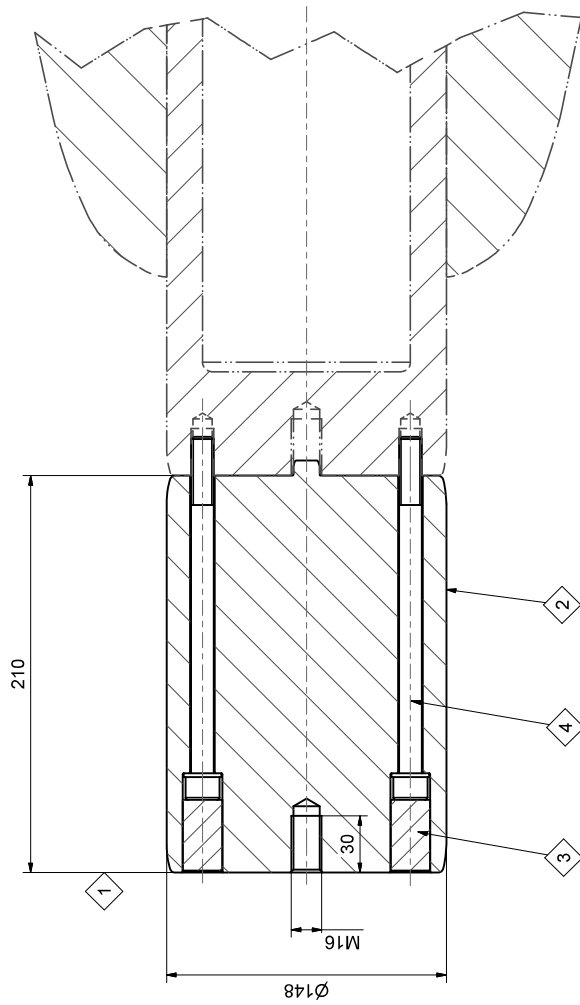


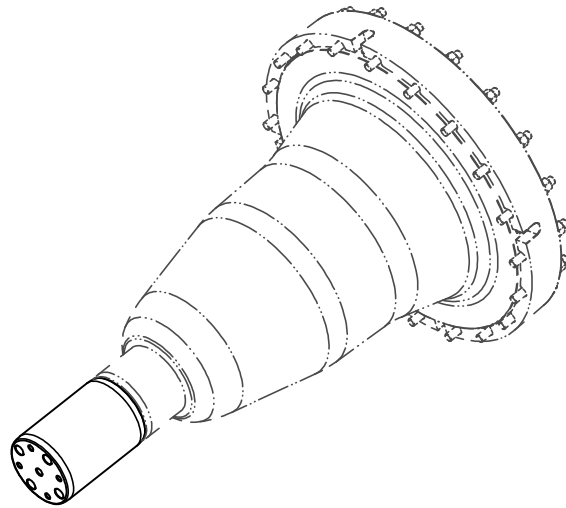

- 1 Kontaktflächen verkuipert:
contact surface copper-coated
 - 2 Umlaufend beschichtet mit PA (Rilsan 11);
circumferential polyamid-coated (Rilsan 11);
 - 3 Füller L=37,5
filler L=37,5
 - 4 Zylinderschraube M12 x 180 + Scheibe 13
cylinder head screw M12 x 180 + washer 13
- Drehmoment / Torque 45Nm**

[illegible]