
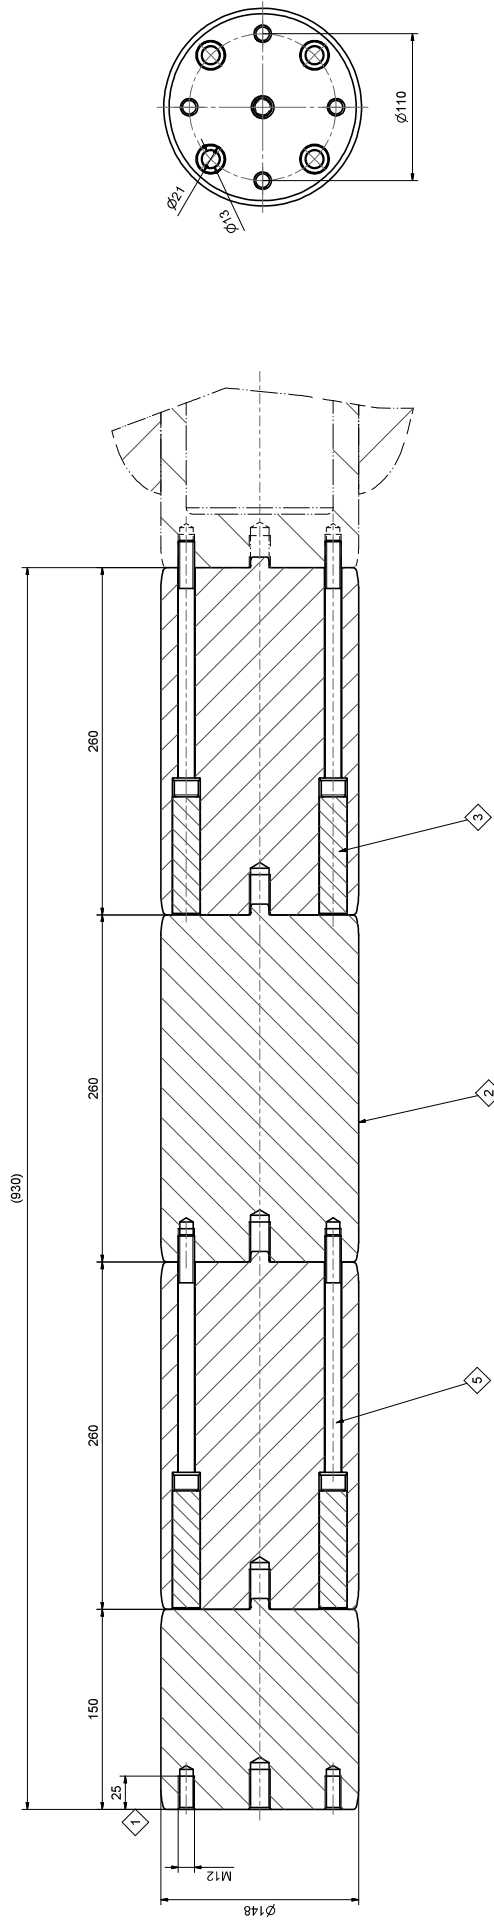


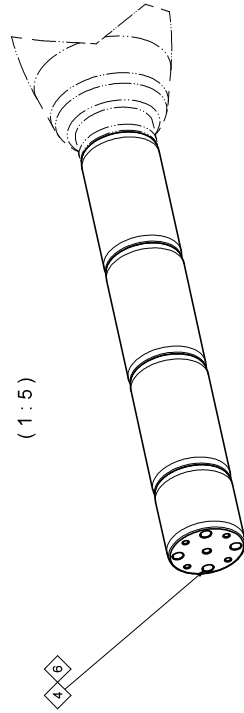

- 1 Kontakflächen verklebt;
contact surface copper-coated
- 2 Unlaufend beschichtet mit PA (Rilsan 11);
circumferential polyamid-coated (Rilsan 11);
- 3 Füller L=87,5
filler L=87,5
- 4 Füller L=37,5
filler L=37,5
- 5 Zylinderschraube M12 x 180 + Scheibe 13
cylinder head screw M12 x 180 + washer 13
- 6 Zylinderschraube M12 x 120 + Scheibe 13
cylinder head screw M12 x 120 + washer 13

[illegible]