


## Stockbridge Damper ST3139

### Features:

- control aeolian vibration in each span of the line within the internationally accepted limits with the minimum number of units
- maintain damping capacity over the entire range of ambient temperatures and for the whole expected life of the line
- be free from corona at the maximum voltage of the line when installed on the phase conductors
- be installed and removed on energized lines
- be maintenance-free for the whole expected life of the line
- maintain a suitable grip on the cable resisting the loosening effect of vibrations
- guarantee that individual components are secured against becoming loose in service

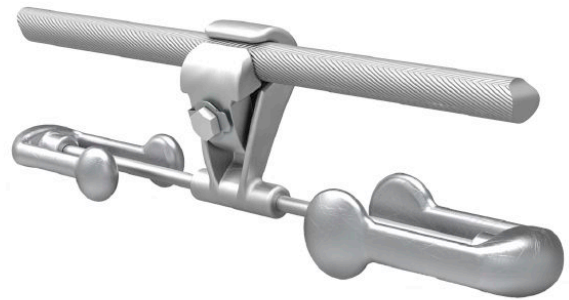

### Materials:

- Clamp: cast aluminium alloy
- Bolt, nut, plain washer: galvanized steel
- Safety plate: stainless steel
- Messenger cable: galvanized steel
- Counterweights: galvanized steel

*Picture may vary.*

### Options:

#### Component Codes:

A Stainless steel messenger cable  
 B Shear head cap  
 S Stainless steel bolt  
 BS Shear head cap and stainless steel bolt  
 BSA Shear head cap, stainless steel bolt and stainless steel messenger cable

#### Orders with component options:

Orders for clamp options must be indicated with the component code of the desired option at the end of the part number.

## Technical Data

<b>Article no.</b>	<b>182 025 402</b>
<b>Type of attachment</b>	<b>Bolted clamps</b>
<b>Clamping range A for conductor diameter</b>	<b>Ø (mm) 31 - 39</b>
<b>Type</b>	<b>ST 3139</b>