


Stockbridge Damper ST01520

Features:

- control aeolian vibration in each span of the line within the internationally accepted limits with the minimum number of units
- maintain damping capacity over the entire range of ambient temperatures and for the whole expected life of the line
- be free from corona at the maximum voltage of the line when installed on the phase conductors
- be installed and removed on energized lines
- be maintenance-free for the whole expected life of the line
- maintain a suitable grip on the cable resisting the loosening effect of vibrations
- guarantee that individual components are secured against becoming loose in service

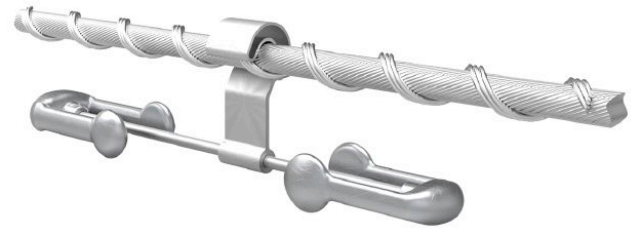

Picture may vary.

Materials:

- Helical rods: aluminium clad steel or galvanized steel
- Clamp: aluminium alloy
- Counterweights: galvanized steel
- Messenger cable: galvanized steel

Options:

Component Codes:

- A Stainless steel messenger cable
- B Shear head cap
- S Stainless steel bolt
- BS Shear head cap and stainless steel bolt
- BSA Shear head cap, stainless steel bolt and stainless steel messenger cable

Orders with component options:

Orders for clamp options must be indicated with the component code of the desired option at the end of the part number.

Technical Data

| | |
|---|------------------------|
| Article no. | 182 025 714 |
| Type of attachment | Helical rod attachment |
| Clamping range A for conductor diameter | Ø (mm) 15.06 - 15.89 |
| Type | STO 1520 |