


# Stockbridge Damper ST01520

## Features:

- control aeolian vibration in each span of the line within the internationally accepted limits with the minimum number of units
- maintain damping capacity over the entire range of ambient temperatures and for the whole expected life of the line
- be free from corona at the maximum voltage of the line when installed on the phase conductors
- be installed and removed on energized lines
- be maintenance-free for the whole expected life of the line
- maintain a suitable grip on the cable resisting the loosening effect of vibrations
- guarantee that individual components are secured against becoming loose in service

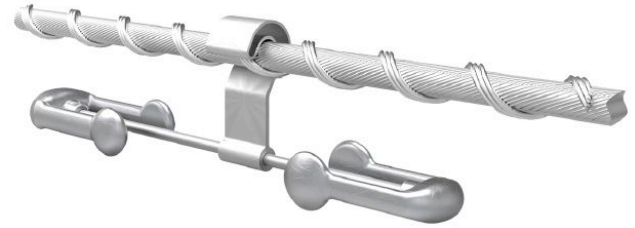

Picture may vary.

## Materials:

- Helical rods: aluminium clad steel or galvanized steel
- Clamp: aluminium alloy
- Counterweights: galvanized steel
- Messenger cable: galvanized steel

## Options:

### Component Codes:

A Stainless steel messenger cable  
B Shear head cap  
S Stainless steel bolt  
BS Shear head cap and stainless steel bolt  
BSA Shear head cap, stainless steel bolt and stainless steel messenger cable

### Orders with component options:

Orders for clamp options must be indicated with the component code of the desired option at the end of the part number.

## Technical Data

Article no.	182 025 717
Type of attachment	Helical rod attachment
Clamping range A for conductor diameter	Ø (mm) 17.83 - 18.68
Type	STO 1520