


# Stockbridge Damper ST01520

## Features:

- control aeolian vibration in each span of the line within the internationally accepted limits with the minimum number of units
- maintain damping capacity over the entire range of ambient temperatures and for the whole expected life of the line
- be free from corona at the maximum voltage of the line when installed on the phase conductors
- be installed and removed on energized lines
- be maintenance-free for the whole expected life of the line
- maintain a suitable grip on the cable resisting the loosening effect of vibrations
- guarantee that individual components are secured against becoming loose in service

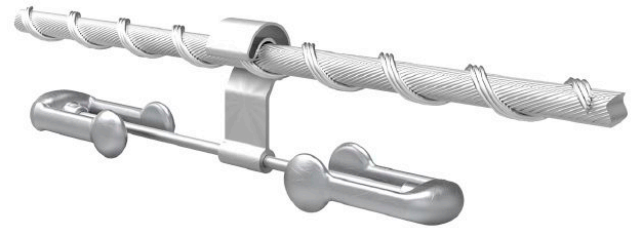

## Materials:

- Helical rods: aluminium clad steel or galvanized steel
- Clamp: aluminium alloy
- Counterweights: galvanized steel
- Messenger cable: galvanized steel

*Picture may vary.*

## Options:

### Component Codes:

A Stainless steel messenger cable  
B Shear head cap  
S Stainless steel bolt  
BS Shear head cap and stainless steel bolt  
BSA Shear head cap, stainless steel bolt and stainless steel messenger cable

### Orders with component options:

Orders for clamp options must be indicated with the component code of the desired option at the end of the part number.

## Technical Data

<b>Article no.</b>	<b>182 025 718</b>
<b>Type of attachment</b>	<b>Helical rod attachment</b>
<b>Clamping range A for conductor diameter</b>	<b>Ø (mm) 18.69 - 19.50</b>
<b>Type</b>	<b>STO 1520</b>

## Dimensions

