


Link Box LB.B.X.3.1.S6.E0.050

PFISTERER's link boxes are key to reliable cross bonding and earthing concepts. The robust design withstands harsh operating conditions and contributes to high availability of plants. A wide product range and portfolio ensures maximum flexibility in planning of cable systems.

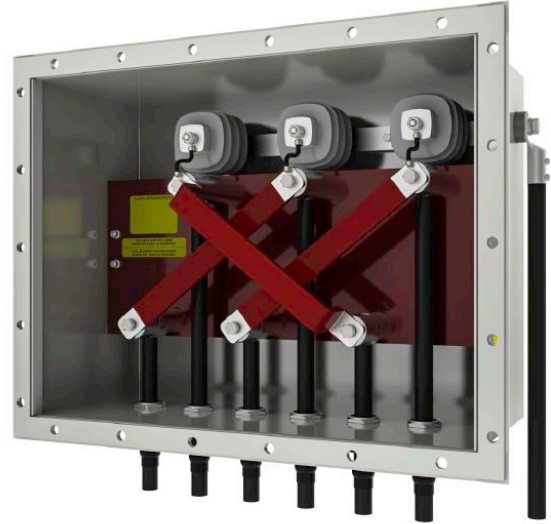

Picture may vary.

Technical Data

| | | |
|---|--|-----------|
| Article no. | 239 003 113 | |
| Application | For underground type | |
| Material | Stainless Steel ANSI 304 | |
| Link Box Type | for cross bonding | |
| Type of bonding lead | Single core cable | |
| Number of bonding cable entries | Six cables connected to the cable screen | |
| Number of earthing cable entries | Earth connected outside the box | |
| Rated voltage of surge arrester | U_r (kV) | 5 |
| Conductor cross section | (mm²) | 300 - 400 |
| Bonding cable conductor diameter | (mm) | 17 - 22 |
| Bonding cable overall diameter | (mm) | 20 - 35 |
| Earthing cable type | Single core | |
| Earthing cable diameter | (mm) | 14 - 25 |
| Earthing cable overall diameter | (mm) | 20 - 35 |
| Protection Type | IP 68 | |