


Multi-range compact tap connector

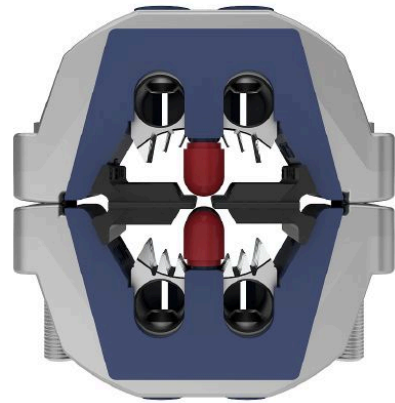

Picture may vary.

Technical Data

| | |
|---|----------------------------------|
| Article no. | 330 407 001 |
| Number of wires | 4 |
| Conductor cross section Al solid circular | (mm ²) 35 - 50 |
| Conductor cross section Cu solid circular | (mm ²) 35 |
| Conductor cross section Al solid sector-shaped | (mm ²) 50 - 70 |
| Conductor cross section Al stranded circular | (mm ²) 35 - 50 |
| Conductor cross section Cu stranded circular | (mm ²) 35 - 50 |
| Conductor cross section Al stranded sector-shaped | (mm ²) 35 - 50 |
| Conductor cross section Cu stranded sector-shaped | (mm ²) 35 - 50 |
| Cross section of tap conductor | (mm ²) 6 - 50 |
| Information on tap conductor | + 70 solid sector-shaped rounded |
| Width across flats for clamp body screw SW1 | 6 |
| Tightening torque for clamp body screw SW1 | fasten until block |
| Width across flats for contact element screw SW2 | 5 |
| Tightening torque for contact element screw SW2 | (Nm) 12 |
| Contact elements | Pyramide shaped contact elements |
| Circumscribed circle diameter | (mm) 83 |
| Matching joint set | AM 130/300 |

Dimensions

| | | |
|-------|------|----|
| Width | (mm) | 32 |
|-------|------|----|
