


Compact tap connector

for Al and Cu four wire cables
(also suitable for Al multi-stranded Al conductors)

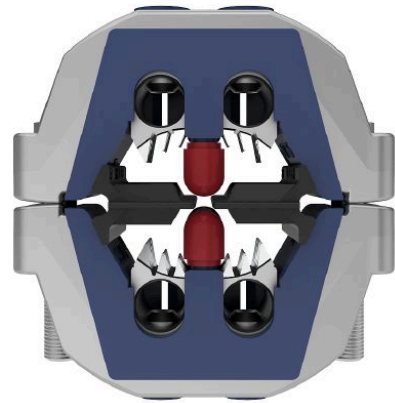

Picture may vary.

Technical Data

| | | |
|--|----------------------------------|--------|
| Article no. | 330 499 400 | |
| Number of wires | 4 | |
| Conductor cross section Al solid sector-shaped | (mm ²) | 150 |
| Conductor cross section Al stranded circular | (mm ²) | 120 |
| Conductor cross section Cu stranded circular | (mm ²) | 120 |
| Conductor cross section Al stranded sector-shaped | (mm ²) | 120 |
| Conductor cross section Cu stranded sector-shaped | (mm ²) | 120 |
| Cross section of tap conductor | (mm ²) | 6 - 70 |
| Information on tap conductor | + 95 solid sector-shaped rounded | |
| Width across flats for clamp body screw SW1 | 6 | |
| Tightening torque for clamp body screw SW1 | fasten until block | |
| Width across flats for contact element screw SW2 | 5 | |
| Tightening torque for contact element screw SW2 | (Nm) | 12 |
| Contact elements | Pyramide shaped contact elements | |
| Circumscribed circle diameter | (mm) | 115 |
| Matching joint set | AM 140/420N, AM 140/420K | |

Dimensions

| | | |
|--------------|------|----|
| Width | (mm) | 32 |
|--------------|------|----|