


# Strain Clamp for Insulated Overhead Lines (ABC)

for dead ends and angled bracing.  
The four cables are fed through separate channels.  
The wedge-type clamp is self-adjusting. Pilot or street lighting conductors are not gripped by the clamp, instead, they are fed alongside the clamp. Maximum tensile stress and breaking strength of the clamp are in accordance with DIN VDE 0211 (2.5 times safety).

**Material:**

- External body: steel, hot-dipped galvanised
- Insert: fibre glass-reinforced plastic

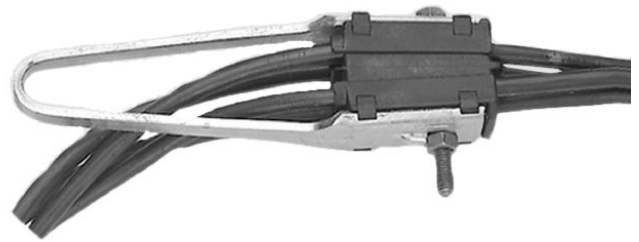

*Picture may vary.*

## Technical Data

<b>Article no.</b>		<b>331 210 790</b>
<b>Number of conductor</b>		<b>4</b>
<b>Conductor cross section</b>	(mm <sup>2</sup> )	<b>70 - 95</b>
<b>Conductor diameter over insulation</b>	Ø (mm)	<b>15,2</b>
<b>Bolt diameter</b>	Ø (mm)	<b>12</b>
<b>Maximum permissible continuous load</b>	(N/mm <sup>2</sup> )	<b>40</b>
<b>Breaking strength of clamp, min</b>	(N)	<b>43000</b>

## Dimensions

<b>Length</b>	(mm)	<b>400</b>
---------------	------	------------