

# 2DIREKT XL Four Wire Transformer Terminal Clamp

for terminal bolts compliant with DIN EN 50386.


For **horizontal** and **vertical** connection of Cu or Al cables to the secondary side of distribution transformers with DIN EN 50386 compliant bolted connections (1 kV).

**Material:**

Body: high-strength Al alloy, tin-plated  
Bolts: Steel, zinc based coating

Width across flats 8 for thrust bolts, 80 Nm.  
Width across flats 6 for cheese-head bolts, 25 Nm.

Other types on request.

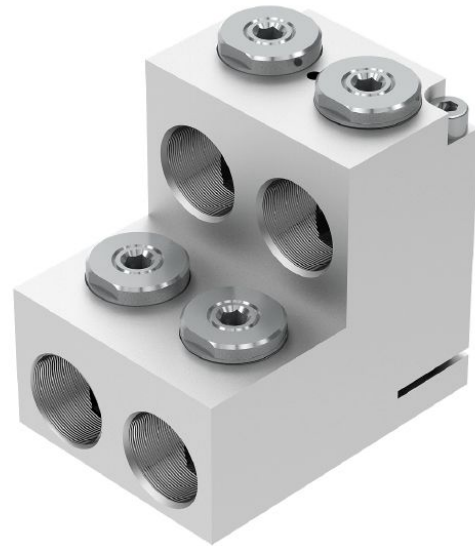

Picture may vary.

## Technical Data

<b>Article no.</b>		<b>331 752 001</b>
<b>Number of conductor</b>		<b>4</b>
<b>Connection possibility</b>		<b>horizontal, vertical</b>
<b>Conductor Cross Sections</b>	<b>(mm<sup>2</sup>)</b>	<b>185 - 400</b>
<b>Conductor type</b>		<b>round stranded flexible, round stranded, sector shaped stranded</b>
<b>Bolted connection</b>	<b>(mm)</b>	<b>M30 x 2</b>
<b>Max. apparent power at 0,4 kV</b>	<b>(kVA)</b>	<b>800</b>
<b>Maximum current</b>	<b>(A)</b>	<b>1250</b>
<b>Earthing possibility</b>		<b>yes</b>
<b>min. distance between termination</b>	<b>(mm)</b>	<b>129</b>

## Dimensions

<b>Length</b>	<b>(mm)</b>	<b>118</b>
<b>Width</b>	<b>(mm)</b>	<b>89</b>
<b>Height</b>	<b>(mm)</b>	<b>112</b>