

## One-Core Indoor Cold-Shrink Termination, 36/42 kV, 400-630 mm<sup>2</sup>, without Bolted Cable Lug

for XLPE cable with copper wire screen.

### Material:


- Silicone

### Benefits:

- Reliable contact of all conductors
- Optimum contact force for all conductors
- No damage to individual conductors
- Excellent insulation
- Self-cleaning and maintenance-free
- Wide range of application
- Tested according to HD 629.1 S2

### Attention:

The cable lug is **not** included in the scope of delivery and has to be ordered separately.

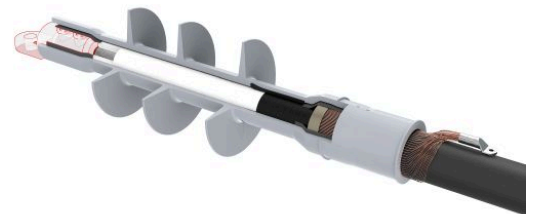

*Picture may vary.*

## Technical Data

Article no.		<b>332 731 305</b>
Designation		PCIT 36-42/400-630-1
Working place		indoor
Cable cross section at 36 kV	(mm <sup>2</sup> )	400 - 630
Cable cross section at 42 kV	(mm <sup>2</sup> )	400 - 630
Recommended cable lug		332 606 012
Cable lug included		no
Coldshrink body type		CTSB
Min. diameter insulation / cable lug	(mm)	35.1
Max. diameter insulation / cable lug	(mm)	61
Max. width lug blade	(mm)	60
Number of sheds		3

## Dimensions

Creepage length C, +/- 20 mm	(mm)	640
Termination length L, +/- 10 mm	(mm)	450
Body inner diameter D1, +/- 1 mm	(mm)	27
Spiral inner diameter D2, +/- 2 mm	(mm)	70
Shed diameter D3, +/- 5 mm	(mm)	100