

One-Core Outdoor Cold-Shrink Termination, 12/24 kV, 50-240 mm², without Bolted Cable Lug

for XLPE cable with copper wire screen.

Material:


- Silicone

Benefits:

- Reliable contact of all conductors
- Optimum contact force for all conductors
- No damage to individual conductors
- Excellent insulation
- Self-cleaning and maintenance-free
- Wide range of application
- Tested according to HD 629.1 S2

Attention:

The cable lug is **not** included in the scope of delivery and has to be ordered separately.

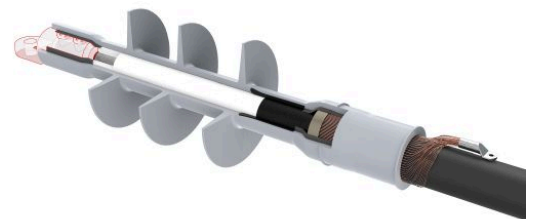

Picture may vary.

Technical Data

Article no.	332 732 101
Designation	PC0T 12-24/50-240-1
Working place	outdoor
Cable cross section at 12 kV	(mm ²) 95 - 240
Cable cross section at 24 kV	(mm ²) 50 - 240
Recommended cable lug	332 595 012
Cable lug included	no
Coldshrink body type	CTSB
Min. diameter insulation / cable lug	(mm) 18.4
Max. diameter insulation / cable lug	(mm) 36
Max. width lug blade	(mm) 40
Number of sheds	3

Dimensions

Creepage length C, +/- 20 mm	(mm)	580
Termination length L, +/- 10 mm	(mm)	390
Body inner diameter D1, +/- 1 mm	(mm)	16
Spiral inner diameter D2, +/- 2 mm	(mm)	50
Shed diameter D3, +/- 5 mm	(mm)	100