

One-Core Outdoor Cold-Shrink Termination, 12/24 kV, 800-1000 mm², with SICON Bolted Cable Lug (332 594 051)


for XLPE cable with copper wire screen.

Material:

- Silicone

Benefits:

- Reliable contact of all conductors
- Optimum contact force for all conductors
- No damage to individual conductors
- Excellent insulation
- Self-cleaning and maintenance-free
- Wide range of application
- Tested according to HD 629.1 S2

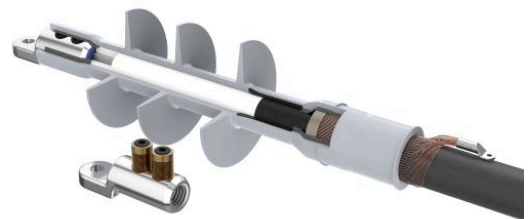

Picture may vary.

Technical Data

Article no.	332 732 206
Designation	PC0T-C 12-24/800-1000-1
Working place	outdoor
Cable cross section at 12 kV	(mm²) 800 - 1000
Cable cross section at 24 kV	(mm²) 800 - 1000
Recommended cable lug	332 594 051
Cable lug included	yes
Coldshrink body type	CTSB
Min. diameter insulation / cable lug	(mm) 36.8
Max. diameter insulation / cable lug	(mm) 72
Max. width lug blade	(mm) 80
Number of sheds	3

Dimensions

Creepage length C, +/- 20 mm	(mm)	680
Termination length L, +/- 10 mm	(mm)	490
Body inner diameter D1, +/- 1 mm	(mm)	32
Spiral inner diameter D2, +/- 2 mm	(mm)	90
Shed diameter D3, +/- 5 mm	(mm)	100