

One-Core Outdoor Cold-Shrink Termination, 36/42 kV, 25-95 mm², without Bolted Cable Lug

for XLPE cable with copper wire screen.

Material:


- Silicone

Benefits:

- Reliable contact of all conductors
- Optimum contact force for all conductors
- No damage to individual conductors
- Excellent insulation
- Self-cleaning and maintenance-free
- Wide range of application
- Tested according to HD 629.1 S2

Attention:

The cable lug is **not** included in the scope of delivery and has to be ordered separately.

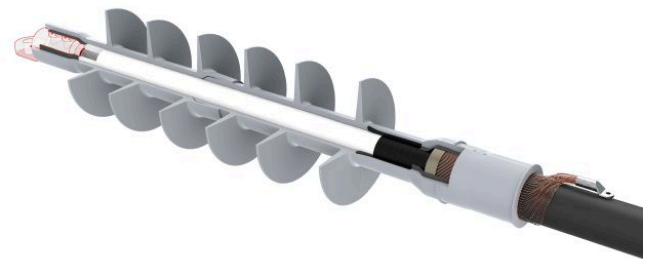

Picture may vary.

Technical Data

Article no.		332 732 300
Designation		PCOT 36-42/25-95-1
Working place		outdoor
Cable cross section at 36 kV	(mm ²)	35 - 95
Cable cross section at 42 kV	(mm ²)	25 - 95
Recommended cable lug		332 604 012
Cable lug included		no
Coldshrink body type		CTSB + CTSC
Min. diameter insulation / cable lug	(mm)	20.8
Max. diameter insulation / cable lug	(mm)	36
Max. width lug blade	(mm)	40
Number of sheds		6

Dimensions

Creepage length C, +/- 20 mm	(mm)	1020
Termination length L, +/- 10 mm	(mm)	640
Body inner diameter D1, +/- 1 mm	(mm)	16
Spiral inner diameter D2, +/- 2 mm	(mm)	50
Shed diameter D3, +/- 5 mm	(mm)	100