

# Ball Pin

According to DIN 48088 Part 1.


**Technical description:**

German Railways licence 4 Ebgw 01.24

- 360 938 095 DB-No. 00 157 503
- 360 938 939 DB-No. 00 157 495
- 360 384 003 DB-No. 00 621 849

**Material:**

Ball pin of E-Cu, electro-tinned, steel threaded bolt.

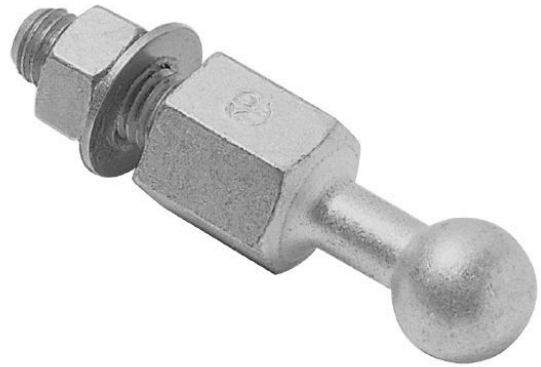

*Picture may vary.*

## Technical Data

|  |                        |                    |
|--|------------------------|--------------------|
| <b>Article no.</b>                           |                        | <b>360 382 004</b> |
| <b>Application</b>                           |                        | straight           |
| <b>Max. cross section of connected cable</b> | (mm <sup>2</sup> )     | 120                |
| <b>Max. short-circuit current</b>            | I <sub>k</sub> 1 s (A) | 23700              |
| <b>Thread</b>                                |                        | M12                |
| <b>Thread length</b>                         | (mm)                   | 28                 |
| <b>Width across flats</b>                    | (SW)                   | 22                 |
| <b>Diameter</b>                              | (mm)                   | 20                 |
| <b>Length of bolt</b>                        | (mm)                   | 28                 |
| <b>Threaded bolt d x l</b>                   | d x l (mm)             | M12 x 28           |
| <b>Weight</b>                                | (g)                    | 250                |
| <b>for line clamp</b>                        |                        | 360 330 002        |
| <b>Max. torque</b>                           | (Nm)                   | 56                 |