


# Multi-contact connection devices U2

Suitable for connecting to 25 mm ball pins.

The multi-contact connection device consists of a copper bar, universal clamp no. 361 346 001, and two 25 mm ball pins no. 360 938 095.

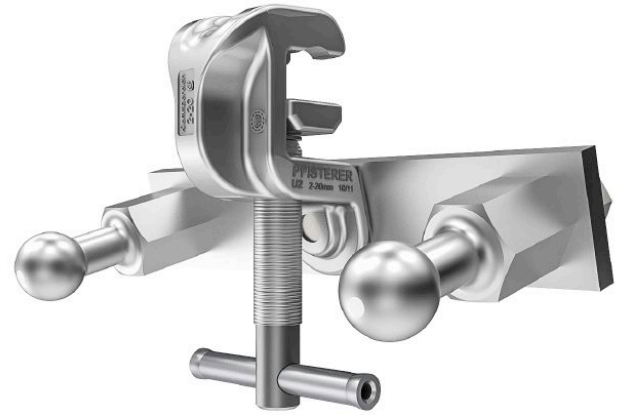

*Picture may vary.*

## Technical Data

<b>Article no.</b>	<b>363 463 463</b>	
<b>Area of application</b>	<b>Switchgear, Overhead Line</b>	
<b>Max. cross section of connected cable</b>	(mm <sup>2</sup> )	150
<b>Max. short-circuit current</b>	I <sub>k</sub> 1 s (A)	29600
<b>Short-circuiting bar</b>	L x B (mm)	200 x 40
<b>Short-circuiting bar thickness</b>	(mm)	6
<b>Diameter</b>	(mm)	25
<b>Number of heads</b>		2
<b>Rail size</b>	(mm)	40/6 x 200