


Multi-contact connection devices U2

Suitable for connecting to 25 mm ball pins.

The multi-contact connection device consists of a copper bar, universal clamp no. 361 346 001, and two 25 mm ball pins no. 360 938 095.

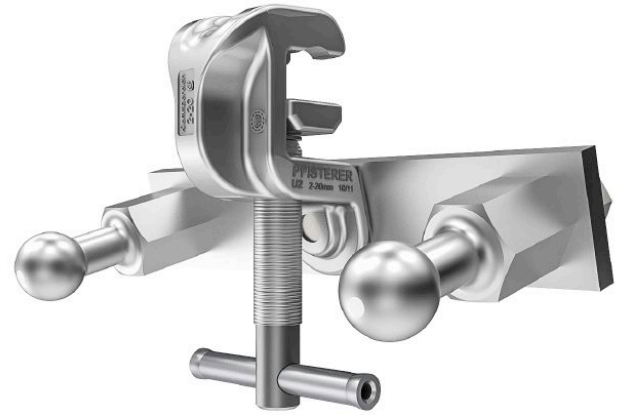

Picture may vary.

Technical Data

Article no.	363 463 463	
Area of application	Switchgear, Overhead Line	
Max. cross section of connected cable	(mm ²)	150
Max. short-circuit current	I _k 1 s (A)	29600
Short-circuiting bar	L x B (mm)	200 x 40
Short-circuiting bar thickness	(mm)	6
Diameter	(mm)	25
Number of heads		2
Rail size	(mm)	40/6 x 200