PFISTERER

# Single-Pole Earthing and Short-Circuiting Device

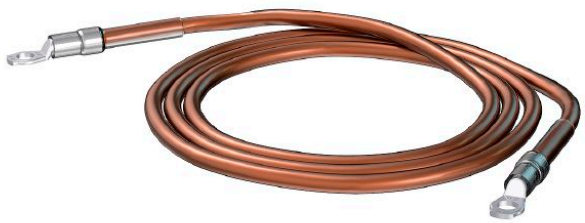

*Picture may vary.*

## Technical Data

| Article no. | | 369 201 001 03724 |
|---|---|---|
| Earthing Clamp | | U5 |
| Clamping range earthing clamp | | 2 - 25 |
| for ball pin diameter | Ø (mm) | 25/30 |
| for T-bolt diameter | Ø (mm) | 20 |
| Line clamp | | U5 |
| Clamping range line clamp | | 2 - 25 |
| for ball pin diameter | Ø (mm) | 25/30 |
| for T-bolt diameter | Ø (mm) | 20 |
| Earthing cable cross section | ($mm^2$) | 95 |
| Cable length | (m) | 15 |
| Max. short-circuit current | (kA) | 18,7 |
| Insulating material | | PVC transparent |
| Language | | German, English |

© 2024 PFISTERER Kontaktsysteme GmbH www.pfisterer.com We accept no liability for printing errors / Subject to technical modifications