


# Pillar, 1 Slide-in door, cable distribution cabinet 190

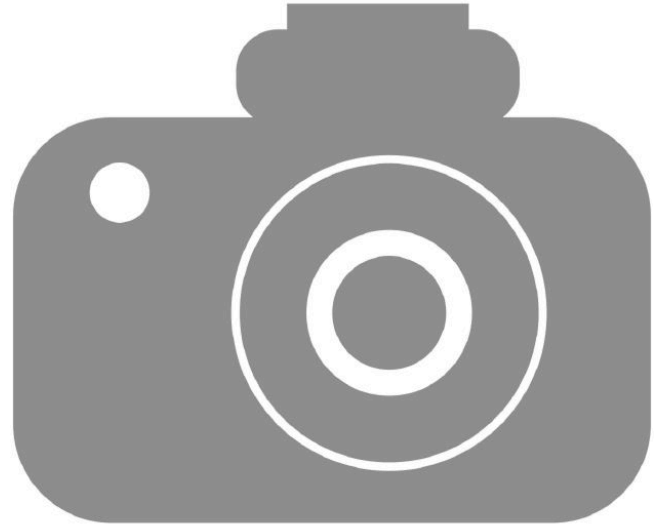

Picture may vary.

## Technical Data

|                                |  |
|--------------------------------|--|
| <b>Article no.</b>             | <b>524 922 001</b>   |
| <b>Locking system</b>          | Lock for 1 profile half cylinder   |
| <b>Surface</b>                 | corrugated   |
| <b>Fault protection switch</b> | 1 Earth leakage circuit breaker<br>63/0.03A<br>1 Earth leakage circuit breaker<br>25/0.03A |
| <b>Outgoing feeder fuses</b>   | 1 x LS C-16A 3 p<br>1 x LS C-32A 3 p<br>1 x LS B-16A 1 p                                   |
| <b>Outgoing feeders</b>        | 1 CEE 32A, 5p<br>1 CEE 16A, 5p<br>3 CEE 16A, 3p  |
| <b>Incoming feeder circuit</b> | Terminals, 5 x 35 mm <sup>2</sup> , fused D02  |

## Dimensions

|               |             |             |
|---------------|-------------|-------------|
| <b>Width</b>  | <b>(mm)</b> | <b>320</b>  |
| <b>Height</b> | <b>(mm)</b> | <b>1420</b> |
| <b>Depth</b>  | <b>(mm)</b> | <b>220</b>  |