


## CONNEX Elbow Joint, Size 6, 170 kV

### Application

- Pluggable connection of two cable runs arranged at right angle
- In combination with CONNEX bushings in vertically suited for temporarily supplying a facility

### Features

- Fast installation thanks to preassembly
- Combination of different conductor materials
- Connects a vast range of cable cross-sections
- Different sizes can be combined on request
- Metal clad
- Fully insulated
- High short-circuit strength
- Maintenance-free
- Maintenance-free gas density monitor (manometer) with remote monitoring option
- Bursting disc  
Sockets are sealed with plastic covers. Voltage-proof dummy plugs to be ordered separately.

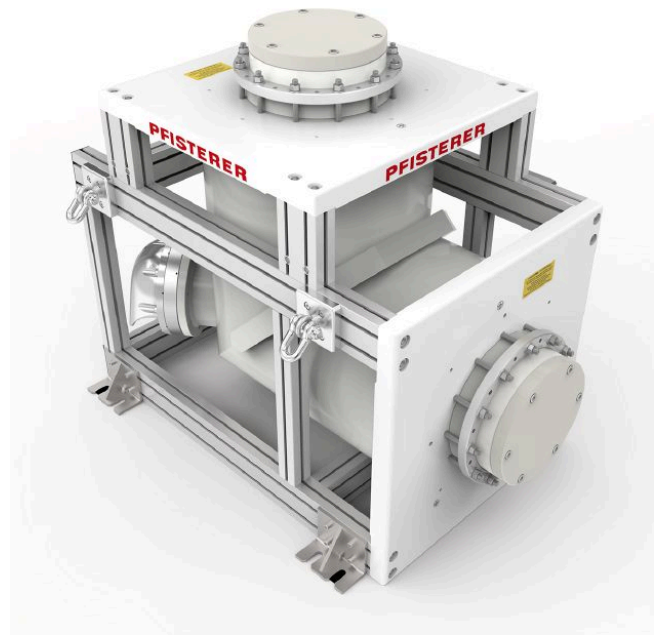

Picture may vary.

## Technical Data

<b>Article no.</b>		<b>827 077 002</b>
<b>Max. system voltage</b>	<b>U<sub>m</sub> (kV)</b>	<b>170</b>
<b>Size</b>		<b>6</b>
<b>Design</b>		<b>angled</b>
<b>Insulation medium</b>		<b>gas</b>
<b>Applicable standards</b>		<b>IEC 60840:2011, IEC 60137, IEC 62271-203:2003</b>
<b>Working place</b>		<b>indoor, outdoor, offshore</b>
<b>Protection Type</b>		<b>IP 67</b>