


CONNEX Elbow Joint, Size 5-S, 145 kV

Application

- Pluggable connection of two cable runs arranged at right angle
- In combination with CONNEX bushings in vertically suited for temporarily supplying a facility

Features

- Fast installation thanks to preassembly
- Combination of different conductor materials
- Connects a vast range of cable cross-sections
- Different sizes can be combined on request
- Metal clad
- Fully insulated
- High short-circuit strength
- Maintenance-free
- Maintenance-free gas density monitor (manometer) with remote monitoring option
- Bursting disc
Sockets are sealed with plastic covers. Voltage-proof dummy plugs to be ordered separately.

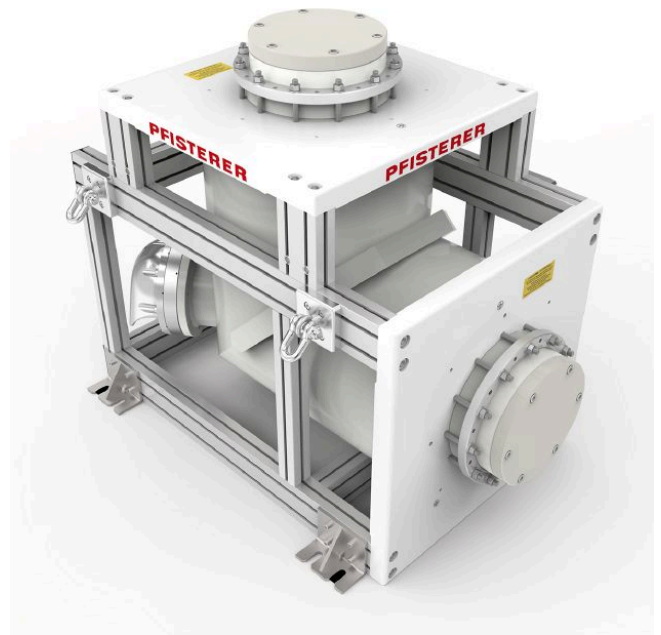

Picture may vary.

Technical Data

| | | |
|-----------------------------|---------------------------|--|
| Article no. | | 827 077 010 |
| Max. system voltage | U_m (kV) | 145 |
| Size | | 5-S |
| Design | | angled |
| Insulation medium | | gas |
| Applicable standards | | IEC 60840:2011, IEC 60137, IEC 62271-203:2003 |
| Working place | | indoor, outdoor and offshore |
| Protection Type | | IP 67 |