


CMA CONNEX Motor Connector, size 1, 13.8 kV

The CMA CONNEX Motor Connector permits the simple and quick connection of high-voltage motors, providing at the same time a completely metal clad and touchproof connector area.

The system is easily connected instead of the motor terminal box. It permits quick start-up and quick motor change in operation.

Attention:

CONNEX separable connectors size 1 for single and three core cables up to 10 kV/240 mm² respectively 20 kV/185 mm² must be ordered separately.

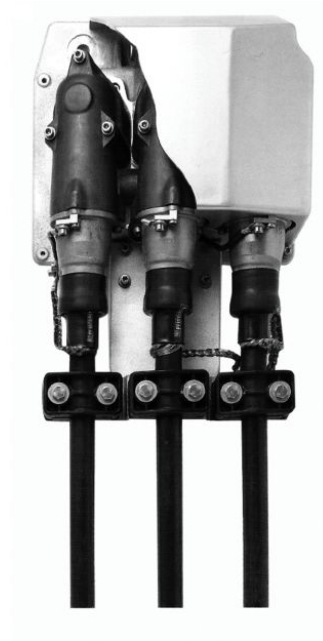

Picture may vary.

Technical Data

Article no.	827 670 002	
Nominal voltage	U_o / U (kV)	13,8
Rated impulse current TESTED	(kA)	125
Rated short-time withstand current 1 s	1 s (kA)	40
Inner sealing cone to	EN 50180, EN 50181	
Cable Connection	Single-core and three-core PVC cables up to max. 240 mm² with CONNEX separable connectors size 1 (must be ordered separately).	
Connection cable	end-winding motor connection max. 95 mm² Cu	
Weight	(kg)	33,5