


ESS123-C34

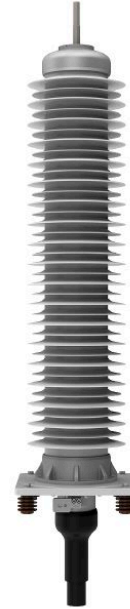

Picture may vary.

Technical Data

Max. system voltage		123
Type of cable termination		oil insulated, composite insulator
Applicable standards		IEC 60840
Rated lightning impulse withstand voltage BIL	(kV)	550
Conductor cross section	(mm ²)	150 - 2500
Diameter over cable insulation	(mm)	42 - 118
Max. diameter over outer cable sheath	(mm)	170
Minimum creepage distance	(mm)	3383