


Outdoor Termination ESS123-C39, 123 kV, silicone, oil-insulated

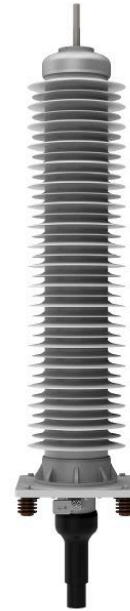

Picture may vary.

Technical Data

Article no.		ESS123-C39
Max. system voltage	U_m (kV)	123
Type Termination		oil insulated, silicone composite insulator (ESS)
Applicable standards		IEC 60840
Rated lightning impulse withstand voltage BIL	(kV)	550
Conductor cross section	(mm²)	150 - 1600
Diameter over cable insulation - prepared	(mm)	42.5 - 99.0
Minimum creepage distance	(mm)	3890
Min. arcing distance	(mm)	1205
Max. diameter over outer cable sheath	(mm)	150