


## ESS170-C72

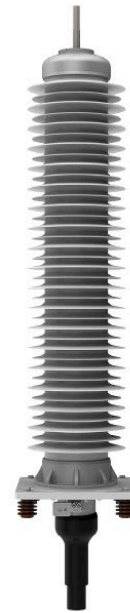

Picture may vary.

### Technical Data

<b>Max. system voltage</b>		<b>170</b>
Type of cable termination		oil insulated, composite insulator
Applied standard		IEC 60840
Rated lightning impulse withstand voltage BIL	(kV)	750
Conductor cross section	(mm <sup>2</sup> )	240 - 2500
Diameter over cable insulation	(mm)	54 - 118
Max. diameter over outer cable sheath	(mm)	170
Minimum creepage distance	(mm)	7250