


# Outdoor Termination ESS170-C72, 170 kV, silicone, oil-insulated

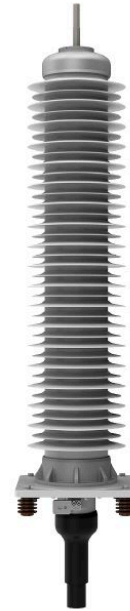

*Picture may vary.*

## Technical Data

<b>Article no.</b>		<b>ESS170-C72</b>
<b>Max. system voltage</b>	<b>U<sub>m</sub> (kV)</b>	<b>170</b>
<b>Type Termination</b>		<b>oil insulated, silicone composite insulator (ESS)</b>
<b>Applicable standards</b>		<b>IEC 60840</b>
<b>Rated lightning impulse withstand voltage BIL</b>	<b>(kV)</b>	<b>750</b>
<b>Conductor cross section</b>	<b>(mm<sup>2</sup>)</b>	<b>185 - 2500</b>
<b>Diameter over cable insulation - prepared</b>	<b>(mm)</b>	<b>53.2 - 118.4</b>
<b>Minimum creepage distance</b>	<b>(mm)</b>	<b>7250</b>
<b>Min. arcing distance</b>	<b>(mm)</b>	<b>2045</b>
<b>Max. diameter over outer cable sheath</b>	<b>(mm)</b>	<b>170</b>