


# Supported Outdoor Termination EST72-C23-SUB, 72.5 kV, dry-insulated

## For substations

The EST SUB is the safe and cost-effective solution for substation. The cable connection and supporting elements are installed independently of each other. The cable termination is installed on the cable on the ground and subsequently raised up into the supporting structure.

- Quick and easy to install
- Oil- and gas-free - leak-proof
- Maintenance-free
- 100% electrically individually tested
- Proven technology

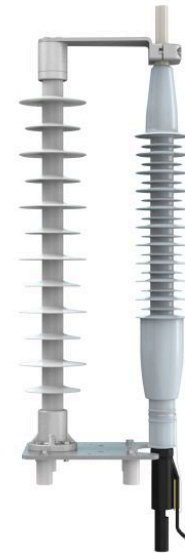

*Picture may vary.*

## Technical Data

Article no.	EST72-C23-SUB	
Max. system voltage	U <sub>m</sub> (kV)	72,5
Type Termination	dry-insulated, supported, for substations (EST-SUB)	
Applicable standards	IEC 60840	
Rated lightning impulse withstand voltage BIL	(kV)	325
Conductor cross section	(mm <sup>2</sup> )	95 - 2500
Diameter over cable insulation - prepared	(mm)	32.5 - 114.5
Minimum creepage distance	(mm)	2248
Min. arcing distance	(mm)	1016